

SORBERPOLY™ 2D GC

polyester sound absorber with glass cloth facing

Sorberpoly™ 2D GC acoustic insulation material is made from non-woven polyester fibres with a glass cloth facing. The product has excellent sound-absorbing and thermal insulation properties.

Manufactured from 100% polyester fibres, Sorberpoly 2D is constructed using a specialised lapping process to form a thick absorbent medium. A glass cloth facing (GC) is thermally bonded to Sorberpoly 2D using a unique method resulting in maximum durability and acoustic performance.

The inherent properties of the GC facing make the product suited to areas where high temperature and abrasion is experienced. The facing further protects Sorberpoly 2D from mechanical damage and dirt ingress.

Sorberpoly 2D GC can be used as a direct replacement for conventional fibreglass based products and traditional acoustic foam materials. It provides excellent thermal insulation, will not hold water and is considerably more durable than traditional acoustic foam.

Sorberpoly 2D will not rot or smell; it has no organic binders or VOC. It is also non-toxic, and inherently hydrophobic (non-wicking), making it well suited to high humidity applications.

VOC, ODP, HEALTH AND SAFETY

Sorberpoly 2D GC is non-toxic and safe to handle by methods prescribed in the Safety Data Sheet.

SPECIFICATIONS

Colour	Grey and black GC facing (additional colours available on request depending on MOQ) White or grey polyester backing
Available	Standard sheet size: 2200 x 1270 mm (untrimmed), 2200 x 1200 mm (trimmed) Standard thicknesses: 25, 38, 50 and 100 mm
	Custom sizes, kit options and/or thicknesses available depending on MOQ

Manufacture can vary by region. Product or parts may be manufactured under agreement with a third party, meeting general specifications listed within the technical data sheet.



applications

- Transport: heavy-duty trucks, bus, earthmoving & mining equipment, walls, roofs and firewalls
- Noise control and thermal insulation for HVAC equipment
- Hydraulic pump, compressor and generator set enclosures
- Open areas requiring reverberation control
- Acoustic baffles and panels

features

- Non-wicking and hydrophobic
- High sound absorption properties and efficient thermal insulation
- Will not degrade, crumble or smell over time
- Non-toxic and will not irritate the skin when handled
- Tough and durable facing - resistant to liquids, dust and sprays
- Multiple assembly/custom kit options available
- Can be used as a replacement to fibreglass/mineral wool in areas subject to high humidity and condensing moisture
- Contains no resin binders which could create an unpleasant odour
- Available with self-adhesive backing for ease of installation



PRODUCT SPECIFICATION

Standard thickness	Standard sheet size ¹		Density ²	Maximum intermittent temperature ³
	Length	Width		
25 mm (1 in)	2200 mm (86.6 in)	1270 mm (50 in)	18, 24, 32, 48 & 60 kg/m ³ (1.12, 1.5, 2, 3 & 3.75 lb/ft ³)	-40 to 150 °C (-40 to 302 °F)
38 mm (1.5 in)				
50 mm (2 in)				
100 mm (4 in)				

Tolerance: Thickness ± 2 mm (0.08 in); Density ± 10%; Width/length ± 10%; Other thicknesses and sheet sizes available on request. Other densities and thicknesses available with varying rolls and sheet dimensions. All the above products are available with pressure-sensitive adhesive backing. Under extreme temperature and humidity conditions, air flow or where the substrate surfaces cannot be free from contaminants, mechanical fixing will be required. For all inverted installations including ceiling installations, mechanical fixing must be done in addition to pressure sensitive adhesive. Please consult your local Pyrotek representative for more information.

Manufacture can vary by region. Product or parts may be manufactured under agreement with a third party, meeting general specifications listed within the technical datasheet.


¹Supplied untrimmed. Some surface coverings may overhang the useable width. ²Commonly sold as 32, 48 & 60 kg/m³. Minimum order quantities may apply. ³Useable at higher temperatures when tested for suitability.

MATERIAL PROPERTIES

Product	Test method	Property	Report no.	Results
Sorberpoly 2D GC	AS 1530.3	Method for fire tests on building materials, components and structures	7-582306-CN	0,0,0,3
Sorberpoly 2D	ASTM C518	Thermal conductivity	DI0567/DU01	0.036 W/mK
	BS 6853	Toxicity testing	2974/R1	R= 0.037
	WSS M99P32-B	Moisture absorption	02015BD	2% at 38 °C, 98% RH for 24 hrs

ACOUSTIC PERFORMANCE

Frequency (Hz)	25 mm	50 mm	100 mm
100	0.07	0.18	0.32
125	0.10	0.24	0.48
160	0.16	0.30	0.62
200	0.24	0.43	0.84
250	0.35	0.66	1.02
315	0.39	0.78	1.16
400	0.52	0.94	1.11
500	0.69	1.06	1.14
630	0.76	1.05	1.10
800	0.87	1.04	1.02
1000	0.93	1.07	0.98
1250	0.98	1.05	0.92
1600	0.98	1.00	0.86
2000	0.97	0.93	0.86
2500	0.94	0.88	0.89
3150	0.90	0.82	0.89
4000	0.85	0.82	0.88
5000	0.76	0.83	0.85
NRC	0.75	0.95	1.00
SAA	0.72	0.91	0.99
α_w	0.65 (MH)	0.90	0.95 (L)

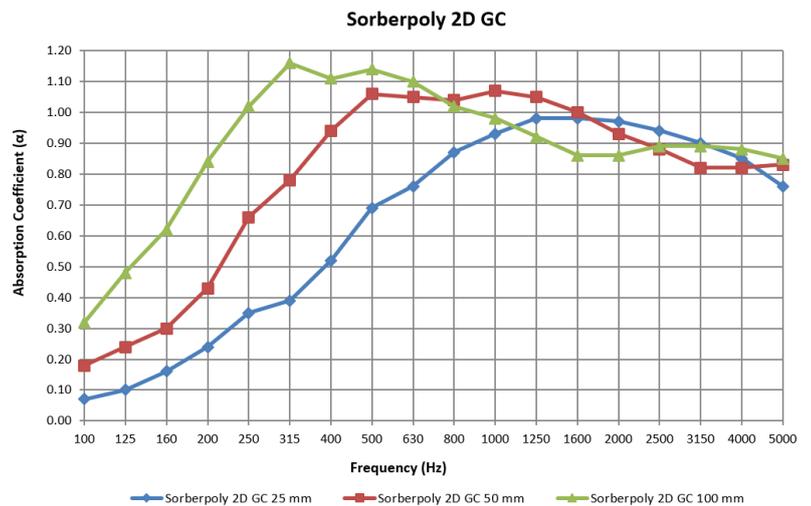

Tested to ISO 354:2003 at University of Canterbury, New Zealand | Report Numbers: 305, 306 & 346

Acoustic results are based on 32 kg/m³ density material

For further information and contact details, please visit our website pyroteknc.com

Caveats: Specifications are subject to change without notice. The data in this document is typical of average values based on tests by independent laboratories or by the manufacturer and are indicative only. Materials must be tested under intended service conditions to determine their suitability for purpose. The conclusions drawn from acoustic test results are as interpreted by qualified independent testing authorities. Nothing here releases the purchaser/user from responsibility to determine the suitability of the product for their project needs. Always seek the opinion of your acoustic, mechanical and fire engineer on data presented by the manufacturer. Due to the wide variety of individual projects, Pyrotek is not responsible for differing outcomes from using their products. Pyrotek disclaims any liability for damages or consequential loss as a result of reliance solely on the information presented. No warranty is made that the use of this information or of the products, processes or equipment to which this Information Page refers will not infringe any third party's patents or rights. **DISCLAIMER:** This document is covered by Pyrotek standard Disclaimer, Warranty and © Copyright clauses. See pyroteknc.com/disclaimer.

