

SORBERFOAM V

perforated vinyl faced acoustic foam

Sorberfoam V combines the next generation of combustion modified, flexible acoustic foams, with an attractive functional and hard wearing perforated vinyl surface covering, enhancing sound absorption in critical mid frequencies. It was developed to meet market requirements for reducing reflected reverberated noise in heavy equipment, automotive and marine industries, or where a cosmetic finish is required.

In conjunction with leading laboratories and test facilities, Pyrotek has formulated and developed polyurethane foam that outperforms traditional acoustic foams by controlling the cell size, porosity, density and the flow resistivity throughout the cell structure.


Sorberfoam has been proven to absorb substantially more energy across the entire frequency range than traditional polyurethane foams. The facing used on Sorberfoam V is a functional and hard-wearing perforated vinyl. Strong and flexible, it has an attractive finish in standard colours with other colours available on request. The perforation maximises critical speech frequency sound absorption.

Traditional polyurethane foams often break down through hydrolysis (foam rot) under hot, humid and acidic conditions. Sorberfoam V is engineered to resist degradation or foam rot.


It offers an alternative to mineral fibre products that tend to shed fibres during application. The tendency for fibrous products to lose thickness over a period of time means their absorption properties will also be reduced. Sorberfoam V eliminates this hazard offering a safer alternative in noise absorption.

SPECIFICATIONS

Surface Colour	Black, grey, beige and sandpiper (Other colours upon request)
Available	Available in 30, 60 m rolls Other roll lengths and sheet sizes also available Minimum order quantities apply
	Thicknesses from 6 to 100 mm
	1.375 m usable width (untrimmed)



Surface colour options

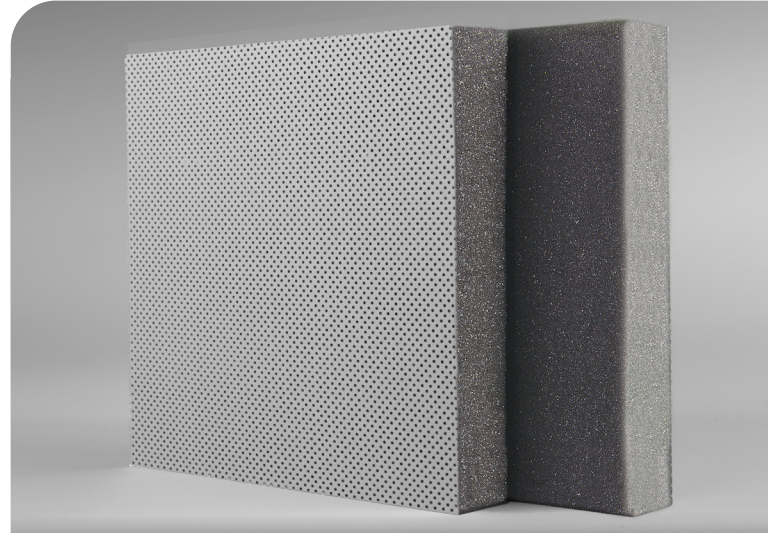

applications

- Optimised noise reduction in truck and tractor cabins and most industrial vehicles
- Highly effective in the speech interference range, especially suited to industrial applications
- Acoustic enclosures, control rooms and recording studios
- Power generation units, machinery and equipment enclosures
- Large acoustic enclosures
- Acoustic screens and wall lining for offices and factories
- Control room and telephone areas

features

- The facing allows noise energy to penetrate the acoustic foam through the perforated facing
- Hydrolysis (foam rot) resistant
- Does not shed irritating fibres
- No ozone-depleting substances generated during manufacture, free from formaldehyde and phenolic resins
- Self-extinguishes upon flame removal
- Quick and easily installed in awkward places
- Easy to cut, adhere or mechanically fasten
- Available with self-adhesive backing for ease of install
- All rolls are typically supplied at 1375mm (Untrimmed)
- Roll lengths - typically 15, 30 and 60 lineal metres. Various roll lengths and sheet sizes also available



PRODUCT SPECIFICATIONS

Standard thickness (mm)	Density (kg/m ³)	Roll length (lineal m)	Sheet Size (lineal m)	Roll width (mm)	Thermal conductivity (w/mk)	Operating temperature range °C
6	28	60	-	1375*	0.033**	-40 to +90 Continuous -40 to +110 Intermittent
12		60	-			
25		30	2.45			
50		-	2.45			

Tolerances: Length: -0 to +50mm; Width: ± 25 mm; Thickness: ± 2mm; Density: ± 5%

*Supplied untrimmed - means some surface coverings such as foils, film or fabric may overhang the ordered useable width

**Polyurethane handbook: Chemistry, Raw Materials, Processing, Application, Properties 2nd edition.

All above products are available with pressure-sensitive adhesive backing. Under extreme temperature conditions or where the substrate surfaces cannot be free from contaminants, mechanical fixing will be required on vertical surfaces. For all inverted installations including ceiling installations, mechanical fixing must be done in addition to PSA adhesion. Please consult your local Pyrotek representative for more information.

MATERIAL PROPERTIES


Test method	Index	Results	Description
UL94	After flame time ≤ 2 seconds	HBF*	Horizontal burn test for foam materials.
FMVSS-302	Burn rate - mm/min	Self extinguishing	Automotive burn rate test. Complies.

*Result applies to 12mm thickness.

ACOUSTIC PERFORMANCE

Frequency (Hz)	12 mm	25 mm	50 mm
100	0.01	0.04	0.10
125	0.03	0.06	0.15
160	0.04	0.09	0.22
200	0.05	0.14	0.35
250	0.09	0.23	0.56
315	0.11	0.28	0.79
400	0.15	0.44	1.01
500	0.20	0.61	1.17
630	0.30	0.77	1.13
800	0.40	0.95	1.09
1000	0.55	1.06	1.03
1250	0.73	1.10	0.95
1600	0.86	0.99	0.99
2000	0.97	0.96	0.98
2500	0.98	0.94	0.95
3150	0.96	0.92	0.97
4000	0.93	0.94	0.95
5000	0.89	0.90	0.92
NRC	0.45	0.70	0.95
SAA	0.45	0.71	0.92
α_w	0.30 (MH)	0.50 (MH)	0.85

Tested to ISO 354:2003 at University of Canterbury, New Zealand
Report Number: 294 295 & 296

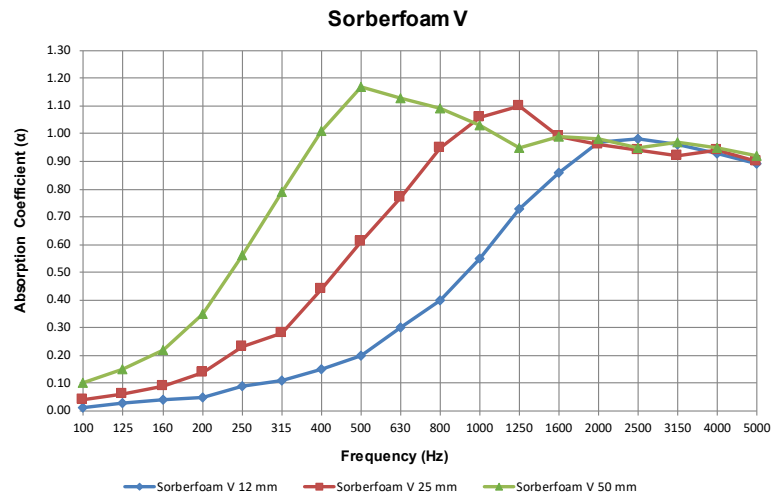

For further information and contact details, please visit our website pyroteknc.com

Caveats: Specifications are subject to change without notice. The data in this document is typical of average values based on tests by independent laboratories or by the manufacturer and are indicative only. Materials must be tested under intended service conditions to determine their suitability for purpose. The conclusions drawn from acoustic test results are as interpreted by qualified independent testing authorities. Nothing here releases the purchaser/user from responsibility to determine the suitability of the product for their project needs. Always seek the opinion of your acoustic, mechanical or fire engineer on data presented by the manufacturer. Due to the wide variety of individual projects, Pyrotek is not responsible for differing outcomes from using their products. Pyrotek disclaims any liability for damages or consequential loss as a result of reliance solely on the information presented. No warranty is made that the use of this information or of the products, processes or equipment to which this Information Page refers will not infringe any third party's patents or rights.
DISCLAIMER: This document is covered by Pyrotek standard Disclaimer, Warranty and © Copyright clauses. See pyroteknc.com/disclaimer.

