


## DECICOAT™ T35



0575

### water-based, sprayable thermal coating

Decicoat T35 is a water-based spray-on thermal insulation coating specially formulated with anti-condensation and corrosion protection properties. It has been developed to meet market requirements in the rail, off-shore, marine, chemical, petroleum, automotive and construction industries.

Unlike traditional insulation materials like glass wool or mineral fibre, Decicoat T35 provides a seamless and sprayable application with 100% coverage. This means Decicoat T35 successfully prevents thermal bridging.

With excellent adhesion to most metals, Decicoat T35 bonds flush with substrates even around uneven surfaces. Depending on the application requirement, it can be used as an independent solution, or to complement other insulation materials, when added protection from condensation and corrosion are required for overall thermal performance.

Condensation is associated with relative humidity, air pressure and occurs when temperature differentials between two areas pass over the 'dew point' threshold. With the right coating thickness, Decicoat T35 regulates surface temperatures of the component by inhibiting thermal transfer to effectively control the onset of condensation.

Near odourless, it complies with international fire codes for rail and marine applications, exhibiting a low spread of flame, low heat release, low toxicity and low smoke release during combustion.



### applications

- Marine vessels: interiors of superstructures and hulls in workboats, luxury yachts and super-liners.
- Rail applications: carriage ceiling and walls
- Industrial: on the underside of metal deck roofing, metal wall cladding or shipping containers
- Applications exposed to high humidity and temperature fluctuations
- Oil & gas/offshore: interior structures of habitable areas and LNG pipelines
- Automotive: heavy vehicles, buses, trailers, tractors
- Applied in conjunction with traditional fibrous or foam insulation to improve overall thermal insulation systems
- Domestic: pipes, walls, interiors

### features

- Thermal insulation, excellent anti-condensation and corrosion protection
- Eliminate thermal bridging
- Complies to international standards - low spread of flame, smoke and toxicity
- Manufactured under ISO 9001 Quality Systems
- Use in conjunction with other insulation materials
- Decrease interior sound levels by damping panel resonance
- Lightweight, non-sag formulation with excellent adhesion to various metal substrates
- Long-lasting, cures to a hard chip, UV and moisture-resistant finish
- Water-based compound – no volatile solvents or thinners required for cleaning - low odour environment
- No primer required - easy, fast and seamless application
- Sprayable - air gun or airless spray system

### SPECIFICATIONS

Colour	White
Available	Pail: 19 L, 5 gal
	Drum: 200 L



**PRODUCT SPECIFICATIONS**

Colour	UOM	Weight	Consumption for 1 mm (0.04 in) DFT. Includes allowance for up to 10% material shrinkage	Service temp range (max short term)	Application guidance
White	19 L (5 gal) pail	0.39 kg/m <sup>2</sup> /mm DFT (0.08 lb/ft <sup>2</sup> /mm DFT)	1.1 L/m <sup>2</sup> (0.027 gal/ft <sup>2</sup> )	-40 °C to 120 °C (-40 °F to -248 °F)	Minimum recommended application: 0.5 mm DFT General purpose installation: 2 mm DFT Other thicknesses as per specification or requirement
	200 L drum				


To achieve a desired dry film thickness, provision for material shrinkage of up to 10% on average should be included when applying a wet coating.

**Storage:** Store between 10 °C to 45 °C (50 °F to 113 °F).

**Shelf Life:** 24 months from receiving goods (stored under recommended conditions).

**MATERIAL PROPERTIES**

Test method	Property	Report	Results
IMO FTP Part 5	Surface flammability	376675	Complies for Bulkhead, walls and ceiling linings up to 2.5 mm thickness on metallic substrate. USCG Type approval granted.
IMO FTP Annex 2	Smoke and toxicity	376675	
MED B	EC Type Certificate (Module B) for Marine Equipment Directive	164.112/112/EWC MED0384TE	
MED D	EC Type Certificate (Module D) for Marine Equipment Directive	MEDD00000UK MEDD00000R4 MEDD00001HN	
DNV Type approval	Type approval certification	F-21139	Complies to DNV GL Offshore Standards, SOLAS & recognised as suitable for use by Transport Canada.
EN 45545-2 (ISO 5658-2)	Spread of flame	503991	R1, R7, R8, HL3
EN 45545-2 (ISO 5660-1 : 50kWm-2)	Heat release rate by cone calorimeter	503995	
EN 45545-2 (ISO 5659-2 : 50kWm-2)	Smoke generation (optical density)	503993	
RISSB AS 7529	Material fire performance	376677, 376678, 376679	Complies with requirements for combustible component material in Locomotive and Passenger rolling stock.
ASTM E 162	Surface flammability	101731845MID-001c	Complies for US (FRA) Federal railroad administration requirements and requirements of NFPA 130 - Complies for US (DOT) Department of transportation requirements for acoustic insulation of transit bus and vans (Docket 90A).
ASTM E 662	Optical Density of Smoke Generated	101731845MID-002c	
ASTM E 800 (SMP-800C)	Gases Present or Generated During Fires	101731845MID-003c	
FMVSS 302	Flammability of interior materials	20713JY	Complies to the requirements of US (DOT) Department of transportation for occupant compartments of motor vehicles.

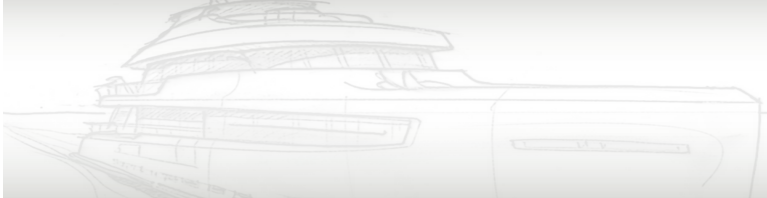


## CHEMICAL RESISTANCE

UV	Water	Petrol	Diesel	10% HCl solution	10% NaOH solution	Permeability (ASTM1653) (Report no. 19013BD1)
2000+ hours	Excellent	Good	Good	Good	Good	< 3 metric perms

## THERMAL PERFORMANCE

Thermal conductivity (ISO 8302) (Report no. 332/13)
0.07 Wm <sup>-1</sup> K <sup>-1</sup>

### Surface temperature comparison with radiated heat

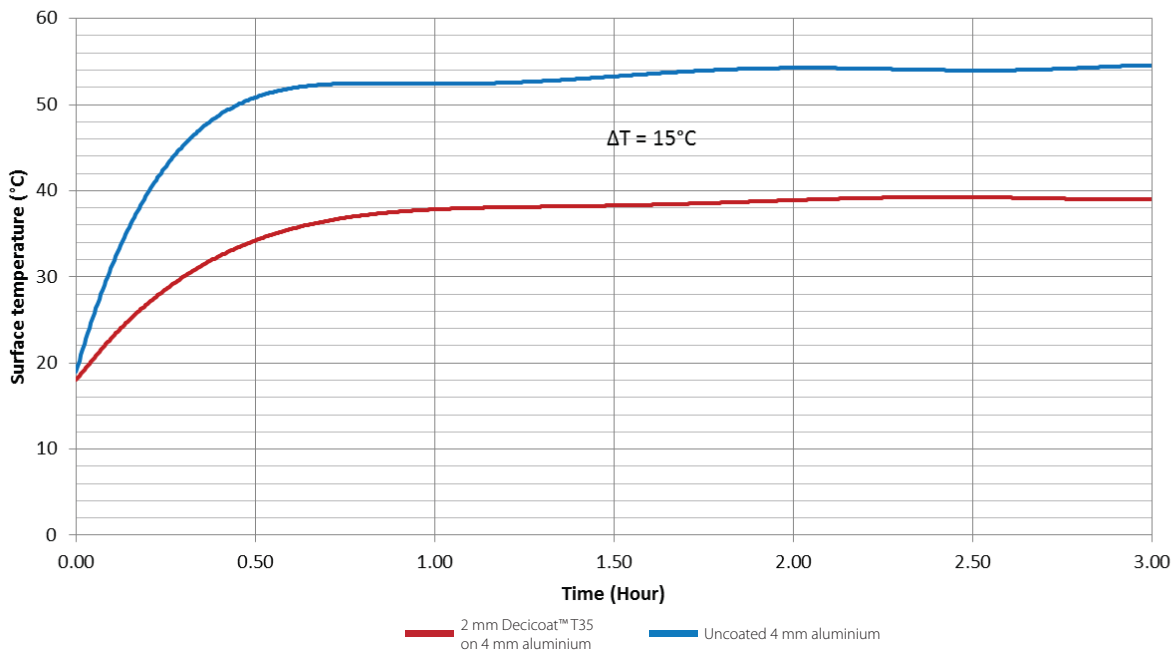

Report no.20613BD1

For further information and contact details, please visit our website [pyroteknc.com](http://pyroteknc.com)

Caveats: Specifications are subject to change without notice. The data in this document is typical of average values based on tests by independent laboratories or by the manufacturer and are indicative only. Materials must be tested under intended service conditions to determine their suitability for purpose. The conclusions drawn from acoustic test results are as interpreted by qualified independent testing authorities. Nothing here releases the purchaser/user from responsibility to determine the suitability of the product for their project needs. Always seek the opinion of your acoustic, mechanical and fire engineer on data presented by the manufacturer. Due to the wide variety of individual projects, Pyrotek is not responsible for differing outcomes from using their products. Pyrotek disclaims any liability for damages or consequential loss as a result of reliance solely on the information presented. No warranty is made that the use of this information or of the products, processes or equipment to which this Information Page refers will not infringe any third party's patents or rights. DISCLAIMER: This document is covered by Pyrotek standard Disclaimer, Warranty and © Copyright clauses. See [pyroteknc.com/disclaimer](http://pyroteknc.com/disclaimer).

