

## SORBERFOAM™ M

### metallised polyester film faced acoustic foam

Sorberfoam™ M combines the next generation of combustion modified, flexible acoustic foams, with a durable impervious facing of metallised polyester film. It was developed to meet market requirements for reducing reverberation noise in light transport, mining equipment, marine and general OEM partial enclosures.

In conjunction with leading laboratories and test facilities, Pyrotek has formulated and developed polyurethane foam that outperforms traditional acoustic foams by controlling the cell size, porosity, density and the flow resistivity throughout the cell structure.


Sorberfoam M has been proven to absorb substantially more energy across the entire frequency range than traditional polyurethane foams. The metallised facing affords mechanical protection and a decorative appearance. It is impermeable to contamination by dust, oil, liquids or sprays.

Traditional polyurethane foams often break down through hydrolysis (foam rot) under hot, humid and acidic conditions. Sorberfoam M is engineered to resist degradation or foam rot.

Sorberfoam M offers an alternative to mineral fibre products that tend to shed fibres during application. The tendency for fibrous products to lose thickness over a period of time means their absorption properties will also be reduced. Sorberfoam M eliminates this hazard offering a safer alternative in noise absorption.

#### SPECIFICATIONS

Surface Colour	Bright silver semi-decorative Available in white mylar facing
Available	Available in 15, 30, 60 m rolls Other roll lengths and sheet sizes also available
	<b>Minimum order quantities apply</b>
	Thicknesses 6 to 100 mm  1.35 m usable width (untrimmed)

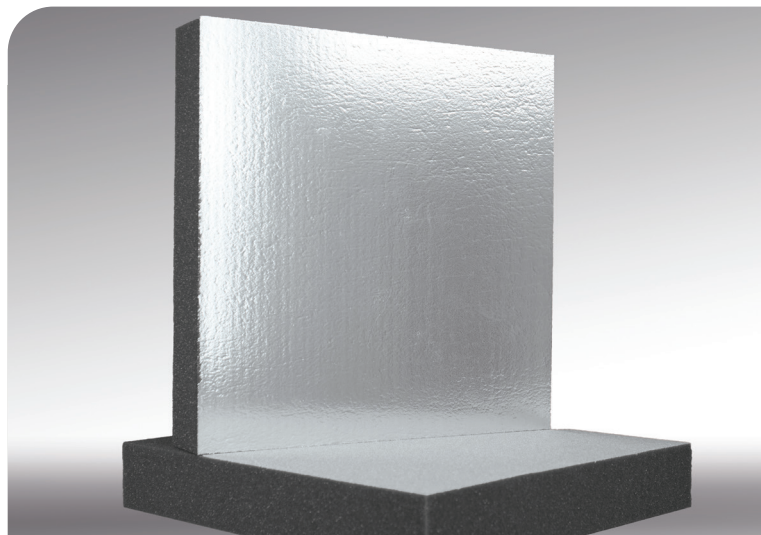

### applications

- Mining equipment
- Machinery and equipment enclosures
- Compressor and generator set enclosures
- Hydraulic pump enclosures
- Car, boat, truck and bus compartments

### features

- Metallised polyester facing allows sound absorption in critical high and mid frequency
- Lightweight with a semi decorative appearance
- Highly reflective for enhanced lighting
- Non conductive and anti-static
- Does not shed irritating fibres
- Hydrolysis (foam rot) resistant
- Impermeable to contamination from dust oils liquids, fuels or sprays
- Low spread of flame surface
- Self-extinguishes upon flame removal
- Quick and easily installed in many places, awkward areas
- No ozone-depleting substances generated during manufacture, free from formaldehyde and phenolic resins
- Available with self-adhesive backing for ease of install
- Roll lengths - typically 15, 30 and 60 lineal metres. Other roll lengths and sheet sizes also available
- Seal joins with metallised tape to eliminate water and dust penetrations



### PRODUCT SPECIFICATIONS

Standard thickness (mm)	Density (kg/m³)	Roll length (lineal m)	Roll width (mm)	Thermal conductivity (W/mK)	Operating temperature range °C
6	28	60	1350*	0.033**	-40 to +90 Continuous -40 to +110 Intermittent
12		60			
25		30			
50		15			

Tolerances: Length: -0 to +50mm; Width: -0 to +5mm; Thickness: +/- 2mm; Density: +/- 5%

\*Supplied untrimmed - means some surface coverings such as foils, film or fabric may overhang the ordered useable width

\*\*Polyurethane handbook: Chemistry, Raw Materials, Processing, Application, Properties 2nd edition.

All above products are available with pressure-sensitive adhesive backing. Under extreme temperature and humidity conditions, air flow or where the substrate surfaces cannot be free from contaminants, mechanical fixing will be required. For all inverted installations including ceiling installations, mechanical fixing must be done in addition to pressure sensitive adhesive. Please consult your local Pyrotek representative for more information.

### MATERIAL PROPERTIES

Test method	Index	Results	Description
UL94	After flame time ≤ 2 seconds	HB*	Horizontal burn test for foam materials.
FMVSS 302	Burn rate - mm/min	Self extinguishing	Automotive burn rate test. Ccomplies


\*Result applies to 12 mm thickness.

### ACOUSTIC PERFORMANCE

Frequency (Hz)	Sorberfoam M 12 mm	Sorberfoam M 25 mm	Sorberfoam M 50 mm
100	0.02	0.05	0.14
125	0.04	0.07	0.28
160	0.05	0.12	0.43
200	0.08	0.20	0.70
250	0.11	0.39	0.78
315	0.15	0.66	0.63
400	0.26	0.98	0.59
500	0.44	0.77	0.62
630	0.66	0.55	0.69
800	0.67	0.46	0.75
1000	0.67	0.50	0.80
1250	0.71	0.51	0.85
1600	0.79	0.57	0.80
2000	0.88	0.66	0.78
2500	0.91	0.80	0.81
3150	0.85	0.73	0.84
4000	0.83	0.66	0.81
5000	0.84	0.67	0.78
NRC	0.55	0.60	0.75
SAA	0.53	0.59	0.73
aw	0.40 (MH)	0.60	0.75

Tested to ISO 354:2003 at University of Canterbury, New Zealand  
Report Numbers: 288, 289 & 290

Sorberfoam M

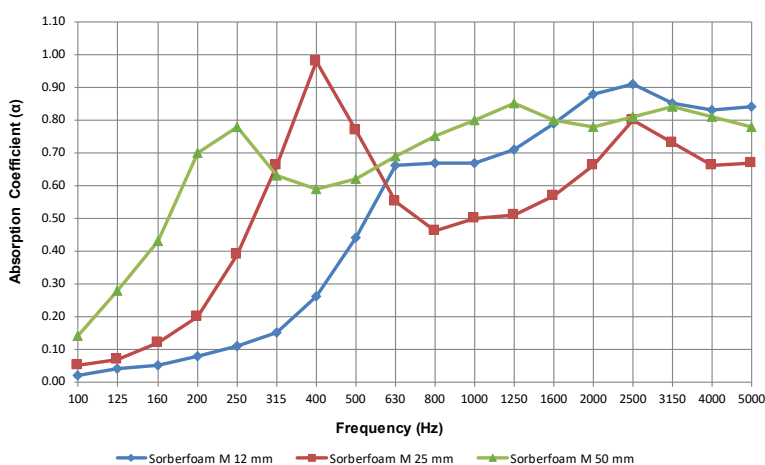

For further information  
and contact details,  
please visit our website  
[pyroteknc.com](http://pyroteknc.com)

Caveats: Specifications are subject to change without notice. The data in this document is typical of average values based on tests by independent laboratories or by the manufacturer and are indicative only. Materials must be tested under intended service conditions to determine their suitability for purpose. The conclusions drawn from acoustic test results are as interpreted by qualified independent testing authorities. Nothing here releases the purchaser/user from responsibility to determine the suitability of the product for their project needs. Always seek the opinion of your acoustic, mechanical or fire engineer on data presented by the manufacturer. Due to the wide variety of individual projects, Pyrotek is not responsible for differing outcomes from using their products. Pyrotek disclaims any liability for damages or consequential loss as a result of reliance solely on the information presented. No warranty is made that the use of this information or of the products, processes or equipment to which this Information Page refers will not infringe any third party's patents or rights.  
DISCLAIMER: This document is covered by Pyrotek standard Disclaimer, Warranty and © Copyright clauses. See [pyroteknc.com/disclaimer](http://pyroteknc.com/disclaimer).

